

GXT Series

Refrigerant Air Dryers
24.0 to 90.1 m³/min

AU

01



Reliable Efficiency

With an advanced stainless steel heat exchanger and low maintenance design, the GXT series high capacity refrigerant dryer will continue saving you money year after year. Offering outstanding electrical power savings and reduced operating costs it's the ultimate energy efficient refrigerant dryer solution.

Design Features

Stainless steel heat exchanger

Not only durable, the corrosion resistant and thermally efficient stainless steel brazed plate heat exchanger will ensure air quality and long term performance.

User friendly control

Standard with an integral fully automatic controller with LED display. The GXT series dryer optimises energy usage by intuitively adapting to system needs.

Environmentally friendly

Energy efficient operation and the use of ozone friendly refrigerants reduce the GXT series refrigerant dryer's environmental impact.

Rugged design

Built with quality components and housed in an epoxy coated galvanised cabinet, the GXT series refrigerant dryer is made to last.

GD
GARDNER DENVER

Experience Proven Results


Dryer Operation

Warm saturated air from the compressor is rapidly chilled in the air to air heat exchanger by the cold air exiting the air to refrigerant heat exchanger.


Precooled air then enters the air to refrigerant heat exchanger and is further chilled, causing water vapour in the air to condense.

A moisture separator lowers the velocity of the air and mechanically separates condensate from the air stream. Liquid condensate is removed from the separator by an automatic timed electric drain.

Cool dry discharge air then re enters the air to air heat exchanger where incoming air warms the discharge air, preventing condensation forming on outlet piping.

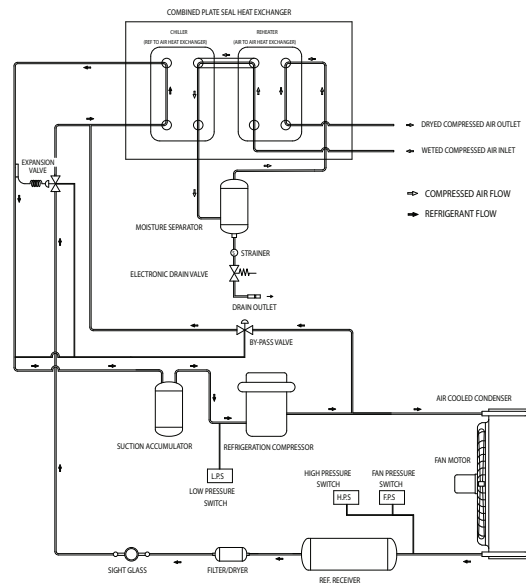

Technical Specifications

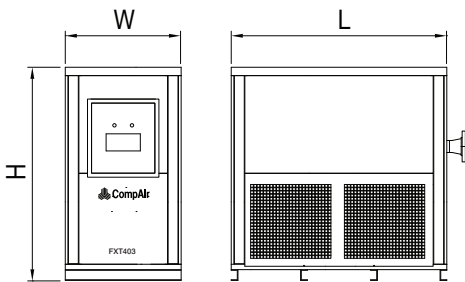

Model	Flow Capacity m ³ /min ⁽¹⁾	Total Power (kW)	Power Supply (VAC 50hz)	Refrigerant Type	Dimensions (L x W x H) (mm)	Connection (ANSI 150)	Weight (Kg)
GXT240	24.0	4.5	400/3	R407C	1470 x 750 x 1400	DN80	285
GXT314	31.4	6.1			1470 x 750 x 1400	DN100	400
GXT375	37.5	7.6			1470 x 750 x 1400	DN100	440
GXT451	45.1	8.6			1582 x 860 x 1600	DN100	850
GXT600	60.0	9.5			1628 x 1050 x 1800	DN150	1000
GXT750	75.0	10.3			1628 x 1050 x 1800	DN150	1050
GXT901	90.1	11.8			1628 x 1050 x 1800	DN150	1100

Correction factors⁽²⁾

To calculate drying capacity for specific conditions, multiply the volume flow capacity by the correction factors (volume flow x A x B x C).

Operating Pressure bar(g) ⁽³⁾	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
A	0.92	0.94	0.96	0.98	1.00	1.01	1.03	1.05	1.07	1.09	1.10	1.11	1.12	1.13	1.14	1.16	1.17

Inlet Temp °C	30	35	40	45	50	55	60
B	1.22	1.00	0.84	0.71	0.58	0.48	0.40

Ambient Temp °C	22	25	30	35	40	45	50
C	1.04	1.00	0.92	0.85	0.78	0.68	0.56

The performance of the dryer (pressure dew point, power consumption, pressure drop etc.) depends mainly on the volume flow and pressure of the compressed air to be dried and the condenser refrigerant temperature.

⁽¹⁾ Measured and stated in accordance with ISO 1217 Annex C at the following conditions: Operating Pressure 7 bar, Air Intake Temperature 35°C, Ambient Temperature 25°C, Outlet Dewpoint 3°C.

⁽²⁾ Stated correction factors are **guide values only**.

⁽³⁾ Maximum operating pressure 16 Bar.